


Available as downflow only



*2 years Parts and Labour, 3 years parts only

WarmCair DW Series



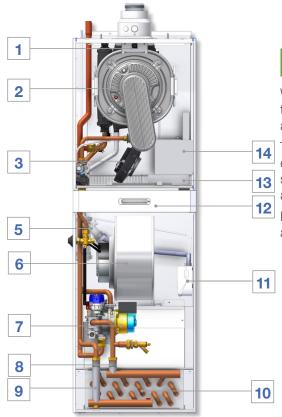

CLEANFLOW ELECTRONIC AIR FILTRATION

With a warm air system, the air within the dwelling passes across the air filters around 6 times per hour.

This presents the perfect opportunity to electronically clean the air and remove smaller particles such as pollen, mould and tobacco smoke.

Ideal for houses with pets, smokers, and people suffering from asthma and other bronchial conditions.

flue turret not supplied with unit

- 1 Flue sensor
- 2 Water heat generator
- 3 Combustion air fan
- 4 Gas valve
- **5** Condensate trap

Johnson

- 6 Air circulation fan
- 7 High Effeciency Pump
- 8 Hot water return to heat source
- 9 Hot water flow from heat source 14 Warm air PCB board
- 10 Warm air heat exchanger
- 11 Condensate pump
- 12 Filter location
- 13 PCB board

TECHNICAL DATA		Output kW	Dimensions H x W x D	Flue Diameter
WARMCAIR DW	C10DW	10.0	1355 X 316 X 550	60/100mm
	C16DW	16.0	1350 X 445 X 515	60/100mm
	C20DW	20.0	1350 X 483 X 628	60/100mm

In the interest of continuous development Johnson & Starley reserve the right to change specification and/or guarantee Cibs periods without prior notice. To view the full Terms & Conditions of our guarantees please visit our website.

