

Q-Vent Compact

Mechanical Ventilation with Heat Recovery



Q-Vent Compact-R
Q-Vent Compact-L


NOTE: Unless otherwise requested the default model supplied is the Q-Vent Compact-R Model




Johnson & Starley Ltd. Rhosili Road, Brackmills, Northampton NN4 7LZ
johnsonandstarley.co.uk 01604 762881

Components

| | | | |
|---|------------------------------------|----|--|
| 1 | Heat Exchanger | 9 | Real Time Clock (RTC) |
| 2 | 100mm/125mm Ø Spigot | 10 | Commissioning Access Panel |
| 3 | Anti-Flood Sensor | 11 | Condensate Tray Assembly |
| 4 | Extract/Supply Fan | 12 | Printed Circuit Board (PCB) & RTC, PCB |
| 5 | Fixing Bracket | 13 | Gravity Condensate Overflow |
| 6 | Condensate Adapter | 14 | Front Cover Plate |
| 7 | Easy to Adjust Commissioning Panel | 15 | Integral Filter |
| 8 | Electrical Cover (Mains Entry) | 16 | Magnetic Filter Cover |

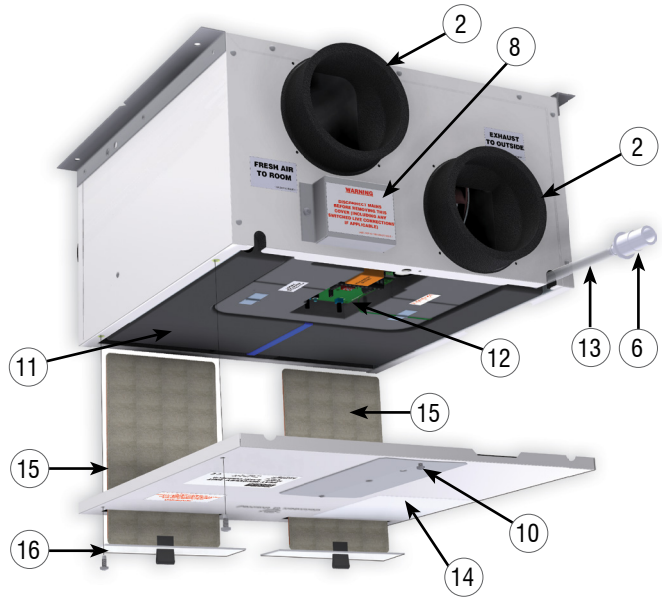

UPWARD ELEVATION (cutaway)

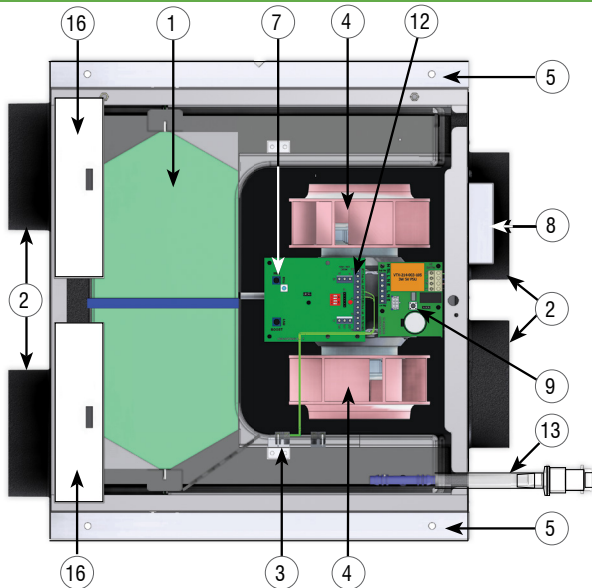




Product Code Q-Vent Compact

| Application | Specific Fan Power (W/l/s) | Heat Exchanger Efficiency |
|----------------------|----------------------------|---------------------------|
| Kitchen + 1 wet room | 1.54 | 84% |
| Kitchen + 2 wet room | 2.00 | 82% |




FEATURES & BENEFITS

- Removable Filters**
 Two inline filters incorporated within the unit.
- Sleep Mode**
 The unit incorporates a Real Time Clock which allows the unit to be configured to block boost demand between pre-set times
- Commissioning Panel**
 An improved installer friendly, easy to adjust, commissioning panel.
- Guarantee**
 The unit shall come with a 5 year guarantee which starts from the day of delivery, and includes parts and labour for the first year and parts only for the remaining 4 years.
- Pre-set Airflow Providing**
 8 l/s @ trickle rate
 24 l/s @ boost rate
- Sound Levels**
 Trickle rate 8 l/s < NR20
 Boost rate 24 l/s < NR30
 Both readings measured at bed head
- Anti Flood Device**
 Condensate sensors fitted as standard
- Fixing Bracket**
 Allows direct fixing to ceiling providing an in-built fall to condensate drain
- Multi Spigot Sizes**
 Connections can be 125mm Ø or 100mm Ø
- Electrical Supply**
 230v fused at 3 amp, easy access via electrical cover plate.
- Delayed Boost**
 Two minute delay after bathroom light activation
- JS11 Switch**
 A filter service light, boost mode, purge mode and summer bypass incorporated into one switch.

DIMENSIONS

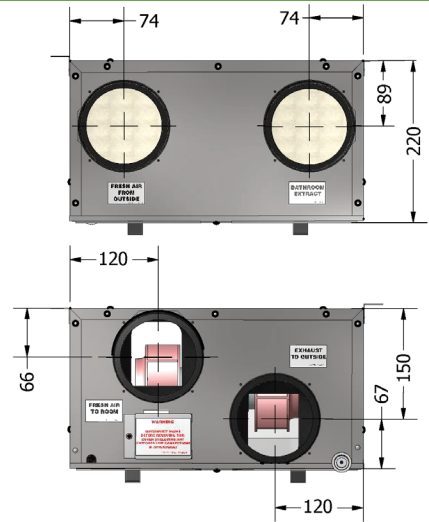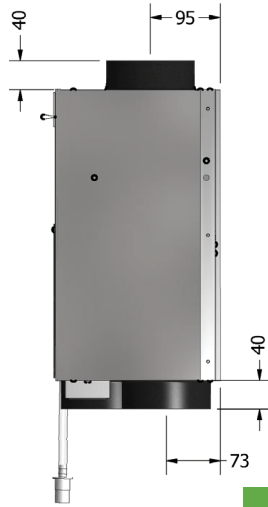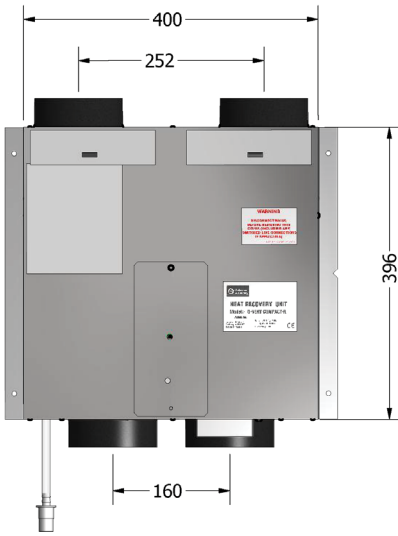

FAN PERFORMANCE

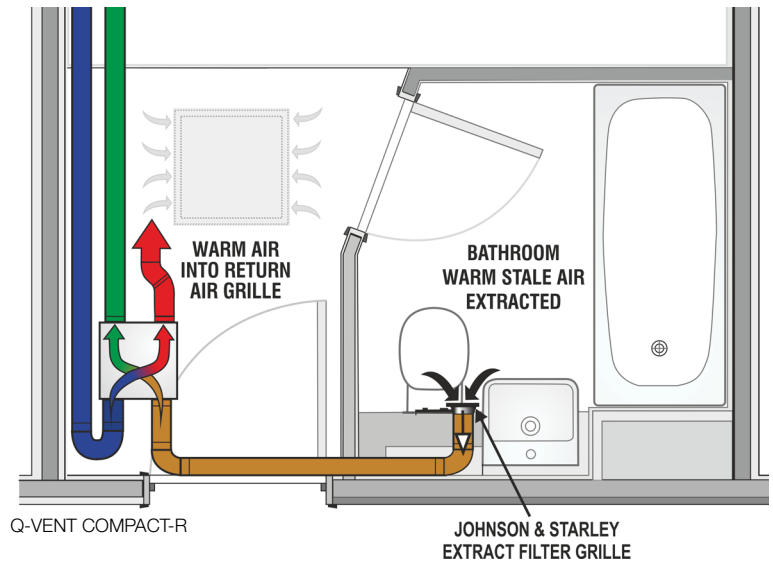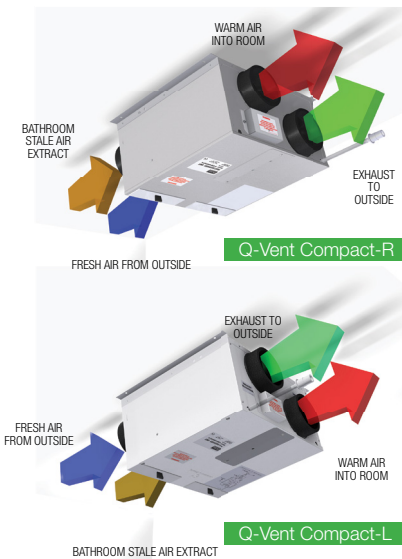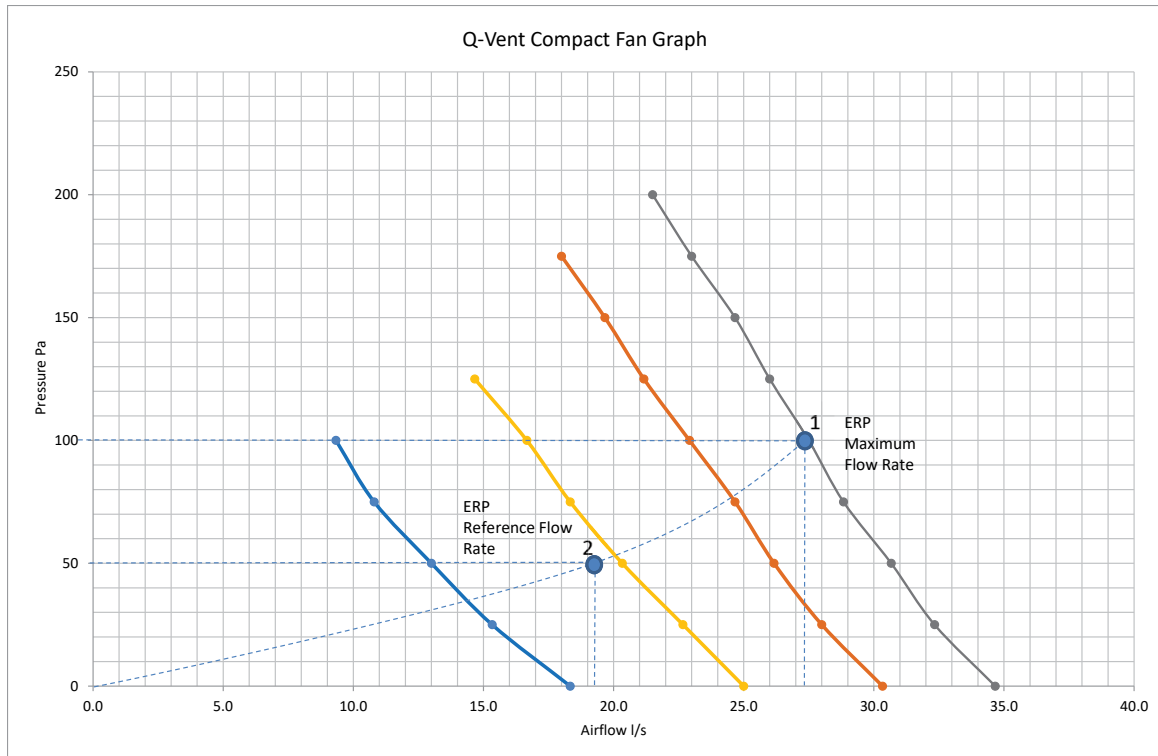

CONTACT DETAILS



sustainable solutions
under one roof

HEATING / HOT WATER / VENTILATION

Dravo

Combat[®]

Heating Solutions Ltd

Sales
Tel: 01604 762881
email: sales@johnsonandstarley.co.uk

Customer Services
Tel: 01604 762881
email: cs@johnsonandstarley.co.uk

Technical
Tel: 01604 762881
email: service@johnsonandstarley.co.uk

Sales
Tel: 01604 707022
email: sales@dravo.co.uk

Customer Service
Tel: 01604 707022
email: info@dravo.co.uk

Technical / Service
Tel: 01604 707023
email: service@dravo.co.uk

Sales
Tel: 0121 506 7700
email: uksales@combat.co.uk

Customer Service
Tel: 0121 506 7700
email: elaine.nightingale@combat.co.uk

Technical / Service
Tel: 0121 506 7700
email: ukservice@combat.co.uk

In the interest of continuous development Johnson & Starley reserve the right to change specification without prior notice.

